


# *Fiberglass Gravity Ventilators*

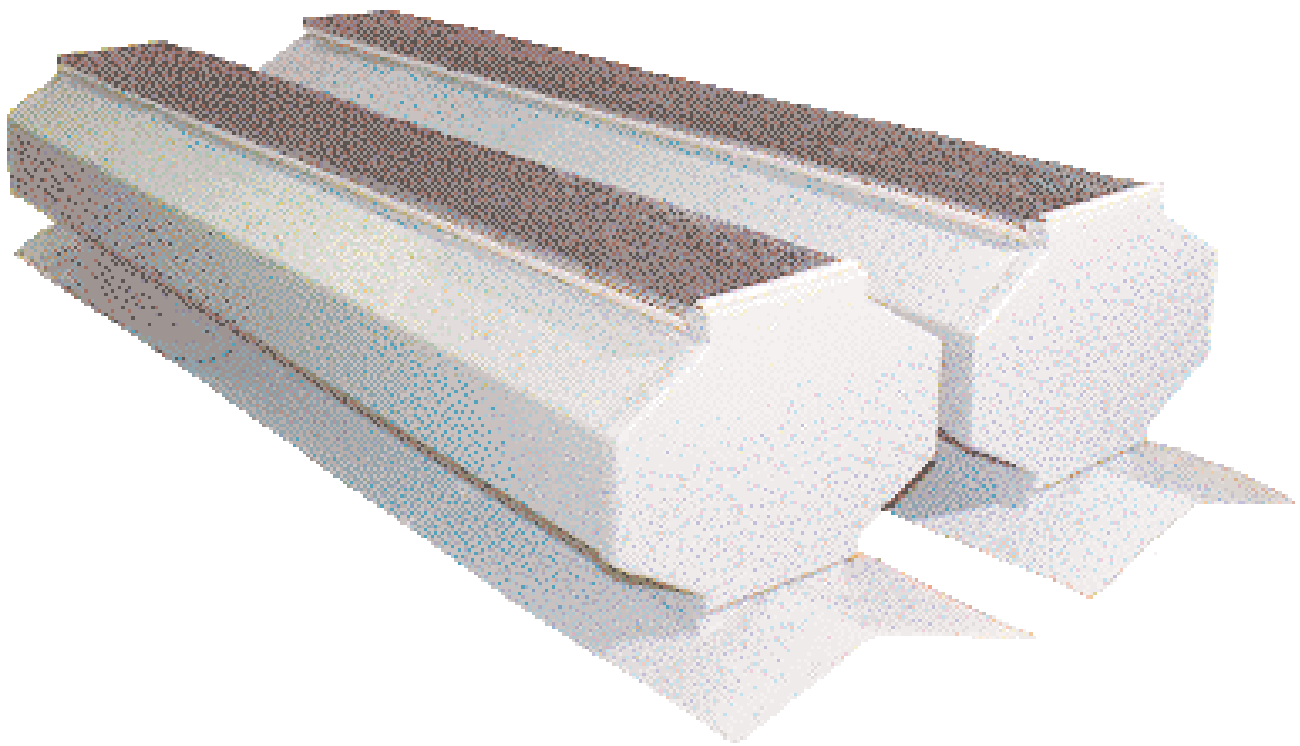

---

 **Polymil Products, Inc.**

51 North Street / P.O. Box 125  
LeRoy, N.Y. 14482  
Phone (585) 768-8170  
Fax (585) 768-7830

# Fiberglass Low Profile Ventilator

Polymil Products' Low Profile Ventilator is a gravity roof ventilator designed with a low contour which fits on a curb and rises above it just 20". It is weatherproof with gutters which provide ample drainage and easy maintenance.

Ventilators can be spaced as single units or joined to create a continuous run of any length.

## Features

- **Vent Sizes:** Standard 4'W X 10'L modules.
- **Material:** Fiberglass, Hetron 99P® polyester resin, Class 1 flame spread of 25. Color: gray.
- **Hardware:** 304 stainless steel.

## Optional Accessories

- **Special Resins:** A variety of special resins are available to suit a specific corrosive application.


- **Damper:** Manual chain operated damper with 10' of cable or motor operated damper.
- **Base:** Fiberglass curb mounting is available.
- **Birdscreen:** 1/2" black polyethylene mesh or 304 stainless steel.

## Specifications

Furnish \_\_\_\_\_ each, size \_\_\_\_\_, Model LPV as manufactured by Polymil Products, Inc.


Unit shall be constructed of Hetron 99P® polyester resin with a Class 1 flamespread of 25 or less and a minimum .1" thickness.

Available accessories include: one piece center pivot damper with corrosion resistant bearings, fiberglass curb mounting, 1/2" mesh polypropylene birdscreen.

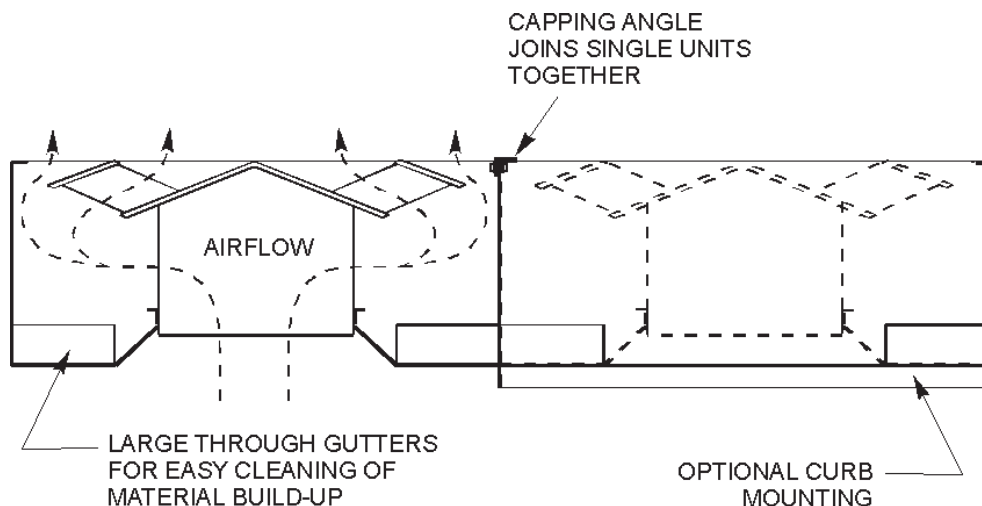

# Fiberglass Continuous Ridge Ventilator

Polymil Products' Continuous Ridge Ventilator, constructed from corrosion-resistant FRP products provide superior performance and service life in severe, corrosive environments which include excess heat, moisture and corrosive gases, liquids and particulates. It is completely weather-proof and designed to offer the least possible resistance to natural air movement due to temperature difference and stack effect and to secure the greatest possible syphon action from wind blowing across the storm band. The high-efficiency design of Polymil Continuous Ridge Ventilators offers considerable savings over powered ventilation costs and virtually no maintenance expense.

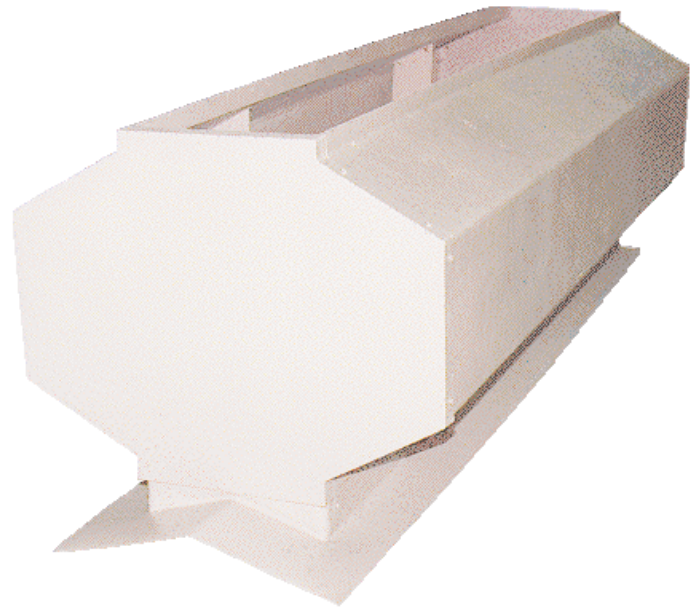

## Features

- **Vent Sizes: Model CRV:** 9", 12", 18", 24", available in 10' modules which can be linked together for continuous runs of any length.
- **Material:** Fiberglass, Hetron 99P® polyester resin, Class 1 flame spread of 25. Color: gray.
- **Hardware:** 304 stainless steel.
- **End Caps:** Two per run.
- **Base:** Self-flashing ridge mount.

## Optional Accessories

- **Special Resins:** A variety of special resins are available to suit a specific corrosive application.
- **Base:** Curb mounted and single slope arrangements are available.
- **Damper:** Manual chain operated damper with 10' of cable or motor operated damper.
- **Birdscreen:** 1/2" black polyethylene mesh or 304 stainless steel.


## Specifications

Furnish \_\_\_\_\_ each, size \_\_\_\_\_, Model CRV as manufactured by Polymil Products, Inc.

Unit shall be constructed of Hetron 99P® polyester resin with a Class 1 flamespread of 25 or less and a minimum .1" thickness.

Available accessories include: one piece center pivot damper with corrosion resistant bearings, 1/2" mesh polypropylene birdscreen.

Fiberglass End Panel

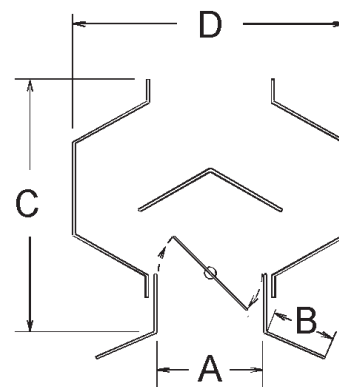

Dimensions (in inches)					
Size	A	B	C	D	Nominal Thickness
9	9	6	16	21	.1
12	12	6	20	28	.1
18	18	6	31	40	.12
24	24	6	36	54	.12

# Fiberglass Louvered Penthouse

Polymil Products' Louvered Penthouse is a low silhouette unit for intake and exhaust applications, and for rooftop equipment cover.

## Features

- **Sizes: Model LP:** Custom sized to fit your needs
- **Material:** Fiberglass, Hetron 99P® polyester resin, Class 1 flame spread of 25. Color: gray.
- **Hardware:** 304 stainless steel.
- **Base:** Fiberglass curb cap. Size can be adapted to fit existing curbs.



## Optional Accessories


- **Special Resin:** A variety of special resins are available to suit a special corrosive application.
- **Base:** Fiberglass curb mounting is available.
- **Damper:** Manual chain operated damper with 10' of cable or motor operated damper.
- **Birdscreen:** 1/2" black polyethylene mesh or 304 stainless steel.

## Specifications

Furnish \_\_\_\_\_ each, size \_\_\_\_\_, Model LP as manufactured by Polymil Products, Inc.

Unit shall be constructed of Hetron 99P® polyester resin with a Class 1 flamespread of 25 or less and a minimum .1" thickness.

Available accessories include: fiberglass curb mounting, one piece center pivot damper with corrosion resistant bearings, 1/2" mesh polypropylene birdscreen.

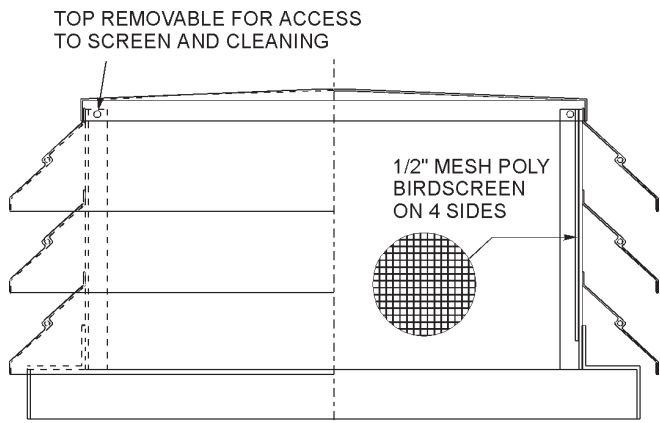

 **Polymil Products, Inc.**

51 North Street/P.O. Box 125  
LeRoy, NY 14482

Phone: (585) 768-8170 Fax: (585) 768-7830

Visit our website at: [www.polymil.com](http://www.polymil.com)

Email us at: [sales@polymil.com](mailto:sales@polymil.com)